


USER'S GUIDE

for

FLYdat

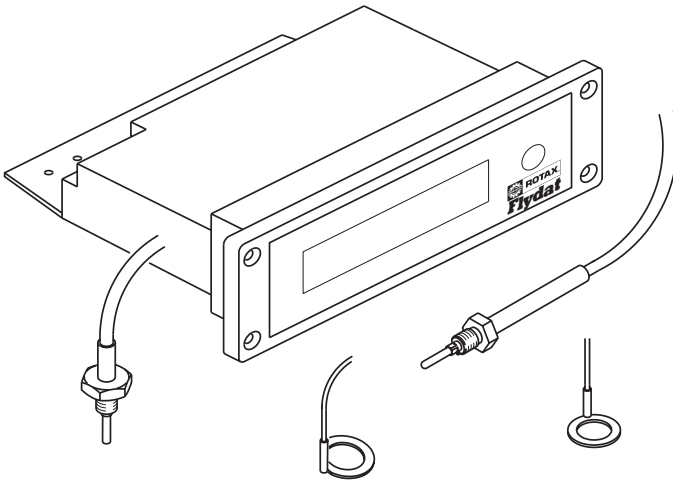

⚠ WARNING

Before starting the engine, read the Operator's Manual. Failure to do so may result in **personal injuries including death**.

Consult the original equipment manufacturer's handbook for additional instructions!

The manual must remain with the engine / original equipment in case of sale.

Ausgabe: 0 vom 1997 10 01

These technical data and the information contained therein are property of BOMBARDIER-ROTAX GmbH and must not be reproduced, neither in entirety nor partially, and passed on to third parties without previous consent in writing by BOMBARDIER-ROTAX GmbH. This text must be written on every complete or partial reproduction.

Copyright - BOMBARDIER-ROTAX GmbH

Approval of translation has been done by best knowledge and judgement - in any case the original text in German language is authoritative.

Recommended price: ATS 100,--

Part no.: 897 730 DM 14,--

Blank Page

Page - 2 -	Date 1997 10 01	OM FLYdat	Reference	Modification-No. - 0 -
---------------	--------------------	--------------	-----------	---------------------------

1)	Table of contents	3
2)	Preface	4
3)	Warning	5
4)	Description of design	6
4.1)	General data	6
4.2)	Possible configurations	7
4.3)	Display allocation	8
5)	Technical data	11
5.1)	Warn- and alarm limits	13
6)	Installation	15
6.1)	General information	15
6.2)	Outline dimensions of the Flydat	15
6.3)	Electric Connections	16
6.4)	Sensor kits	16
6.5)	Installation of the sensors	17
6.6)	Installation plan for the individual sensor kits	19
6.7)	Signalling device	22
6.8)	Wiring diagram for different engine types:	23
7)	Operation	27
7.1)	Initial start-up	27
7.2)	Reaction at start	27
7.3)	Possible display	29
7.4)	Control of readings	31
7.5)	Data recording in operation	32
7.6)	Report of errors	33
7.7)	Fuse of unit	35
8)	Service and Distribution Partners	36
9)	Conditions of warranty.	43
9.1)	Period of warranty	43
9.2)	Tasks performed by an authorized BOMBARDIER- ROTAX distributor	43
9.3)	Condition to have warranty work performed	43
9.4)	Exclusion - not covered by warranty:	44
9.5)	Expressed or implied warranties:	45
9.6)	Consumer assistance procedure:	45
9.7)	Warranty claims	46
9.9)	Caution	46
7)	Warranty registration card	49

2) Preface

Congratulations to your decision to use the *FLYdat*, specially developed for ROTAX Aircraft Engines for indicating and storing of engine operation data. Prior to taking the *FLYdat* into service, please, read the Guide carefully, as it will acquaint you with the basic knowledge of technical data, installation and the safe handling of the *FLYdat*.

If you don't understand everything in this manual or in case of any questions arising, please, contact the nearest authorized ROTAX Distributor or Service Partner.

This manual is protected by copyright, with all rights reserved. It may not, in whole or part, be copied, reproduced, translated or converted to any electronic medium or machine-readable form without prior consent in writing from ROTAX.

We wish you fun and satisfaction when flying the Rotax powered aircraft, supplemented by the FLYdat.

Page - 4 -	Date 1997 10 01	OM <i>FLYdat</i>	Reference	Modification-No. - 0 -
---------------	--------------------	---------------------	-----------	---------------------------

3) Warning

The **FLYdat** has not undergone any safety and durability examination to the Standards of Civil Aviation but it does incorporate the latest technical development and has been thoroughly tested.

Despite of **FLYdat** being a precision instrument, false indication or misinterpretation of data could occur. By utilizing the **FLYdat** the user acknowledges the possible danger and responsibility for all risks.

To minimize the risks, study the Guide carefully. Before the content of the Manual is not understood completely you may not take the **FLYdat** into Service.


Please, pay attention to the following symbols throughout the manual emphasizing particular information.

▲ **WARNING:** Identifies an instruction, which if not followed, may cause serious injury or even death.

■ **ATTENTION:** Denotes an instruction which if not followed, may severely damage the engine or other components.

◆ **NOTE:** Information useful for better handling of the **FLYdat**.

P.T.O. stands for power take off side and M.S. for magneto side throughout Technical Documentation of Rotax, for precise destination of location.

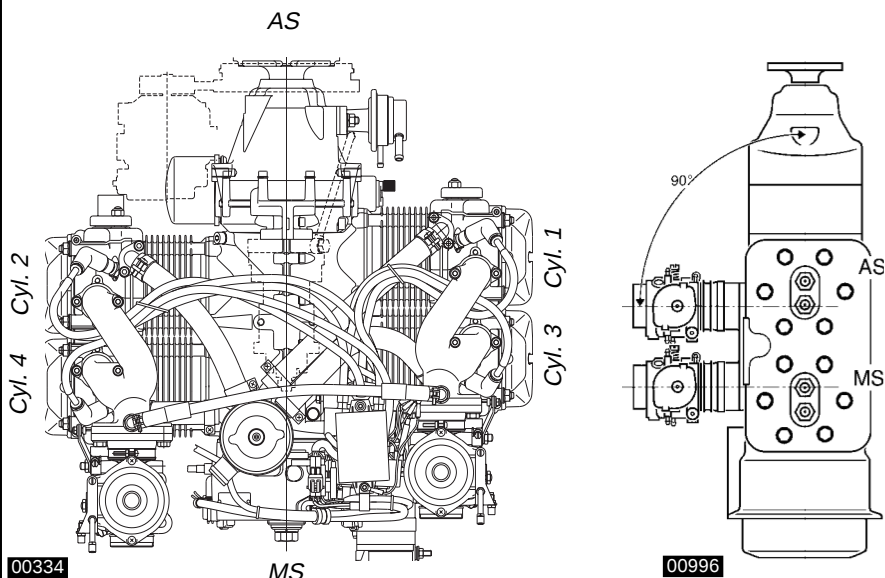

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 5 -
---------------------------	-----------	--------------	--------------------	---------------

4) Description of design

4.1) General data

The **FLYdat** represents an instrument especially developed for Rotax aircraft engines for indication and acquisition of engine operating data readily accessible for the pilot.

The **FLYdat** is furnished with 8 sensor input ports, which can be occupied variably according to engine type.

The operating data is permanently compared with the engine specific operating limit. If the signalled operating data exceeds the stored operating limit, the **FLYdat** will warn the pilot.

In addition all the input ports are equipped with a maximum alarm, responding when picked-up value is equal or above the stored limit.

Two or more readings will never be indicated simultaneously but in succession updated on the display. The updating of all the readings takes less than one second.

The **FLYdat** keeps the pilot informed on the following actual readings:

- ↔ Engine speed
- ↔ Cylinder head temperature (CHT)
- ↔ Exhaust gas temperature (EGT)
- ↔ Ambient air temperature (not on engines 912 / 914)
- ↔ Temperature of cooling water (only on engines 582 UL, 618 UL)
- ↔ Oil temperature and oil pressure (only on engines 912 / 914)

Besides the topical data, the **FLYdat** shows also the hours of operation.

The separately picked up readings are issued in accordance to display allocation.

For maintenance and analyses of engine shortcomings the **FLYdat** picks up and stores the essential operating data. For safety's sake the programmed service date reminds you of the scheduled maintenance of engine.

The handy unit offers a number of appreciable assets compared to conventional dial gauge indication. Besides easy installation, the low weight and compact size are essential advantages of the **FLYdat**.

Page - 6 -	Date 1997 10 01	OM <i>FLYdat</i>	Reference	Modification-No. - 0 -
---------------	--------------------	---------------------	-----------	---------------------------

4.2) Possible configurations

The **FLYdat** is supplied by Rotax with a standard configuration.

With the standard configuration all trigger levels for warning- and alarm system are set to the **maximum of the measuring range**, i.e. no checks for exceeding of warning limits.

The **FLYdat** can be coordinated by the authorized Rotax Distributor with the respective engine type. With this configuration warn- and alarm limits are set for specific channels.

Configuration is available for the following engine types:

- ⇒ 447 UL SCDI
- ⇒ 503 UL DCDI
- ⇒ 582 UL DCDI
- ⇒ 618 UL DCDI
- ⇒ 912 DCDI series
- ⇒ 914 DCDI series
- ⇒ STANDARD

By configuration of the **FLYdat**, the engine type, engine number, hours of operation, temperature unit and the respective engine limits are programmed.

◆ NOTE: If the **FLYdat** is utilized on a used engine, the existing time of operation can be taken into account.

▲ WARNING: If using the **FLYdat** with the standard configuration the indication will work flawless, but because warning- and alarm limits are set to a high level, therefore no warning at danger .

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 7 -
---------------------------	-----------	--------------	--------------------	---------------

4.3) Display allocation


Display allocation at state of supply as per standard configuration. By programming the *FLYdat* it will be adapted to the respective engine type.

Pay attention to the **WARNING** below the display:

Before using this instrument it is imperative to read the Operator's Manual (User's Guide) in its entirety. If you do not understand everything in this Manual (Guide), do not use this instrument.

Because of the similar design of some engines, the following engines can be dealt with in categories.

Standard

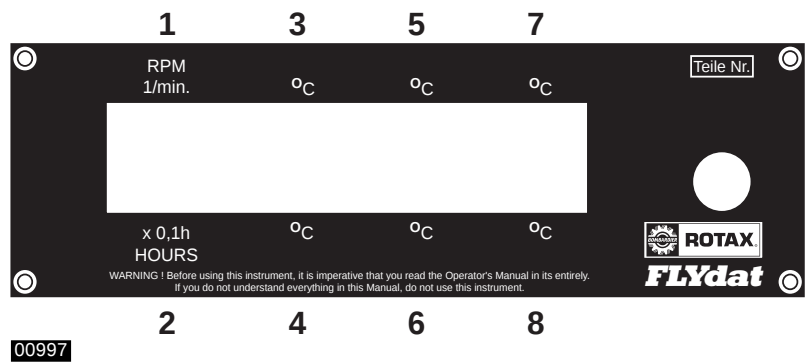


Display field	Designation	Unit	Resolution
1	Engine speed	rpm	1
2	Hours of operation	h	0,1
3	Temperature 1	°C	1
4	Temperature 2	°C	1
5	Temperature 3	°C	1
6	Temperature 4	°C	1
7	Temperature 5	°C	1
8	Temperature 6	°C	1

Liquid cooled 2-stroke-engines

↔ 582 UL

↔ 618 UL

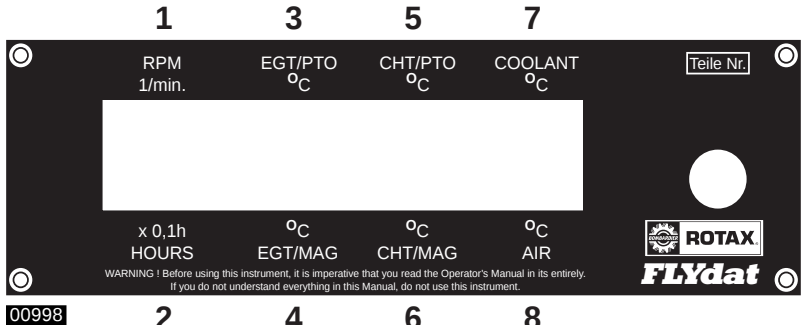

Display field	Designation	Unit	Resolution
1	Engine speed	rpm	1
2	Hours of operation	h	0,1
3	Exhaust gas temp. PTO	°C or °F	1 or 10
4	Exhaust gas temp. MS	°C or °F	1 or 10
5	Cylinder head temp. PTO	°C or °F	1
6	Cylinder head temp. MS	°C or °F	1
7	Coolant temperature	°C or °F	1
8	Ambient air temperature	°C or °F	1

Aircooled 2-stroke-engines

↔ 447 UL

↔ 503 UL



Display coverage as above, but display 7 not occupied.

Modification-No.
- 0 -

Reference

OM
FLYdat


Date
1997 10 01

Page
- 9 -

Liquid cooled 4-stroke-engines

⇔ 912 DCDI series

⇔ 914 DCDI series

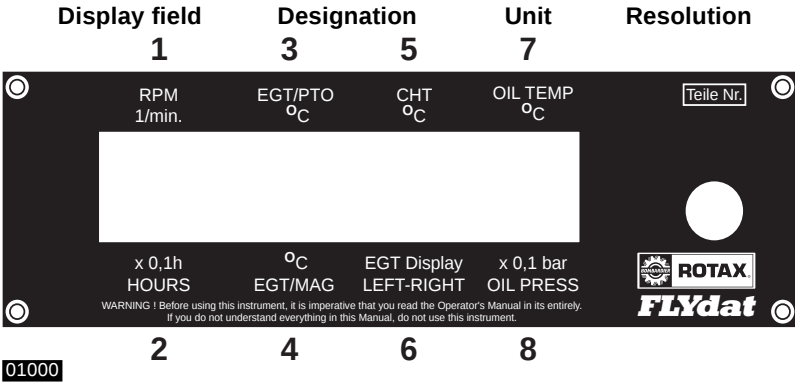

- 1 Engine speed rpm 1
- 2 Hours of operation h 0,1
- 3 Exhaust gas temp. AS . °C or °F 1 or 10
- 4 Exhaust gas temp. MS °C or °F 1 or 10
- 5 Cylinder head temp. °C or °F 1
- 6 x)
- 7 Oil temperature °C or °F 1
- 8 Oil pressure bar 0,1

x) indicating the line of cylinders from which the exhaust gas temp. is picked up

◆ NOTE: Arrow ← denotes left line of cylinders
 Arrow → denotes right line of cylinders
 The change over of the readings of exhaust gas temperature is every 6 to 8 seconds.

5) Technical data

Design:	plastic injection molded housing with plexiglass front plate, easy to exchange
Function:	⇒ display of actual values of engine speed temperatures oil pressure ⇒ Counting hours of operation ⇒ Control of limits ⇒ Alarm output ⇒ Display of maintenance schedule ⇒ Control of sensors ⇒ Autocontrol ⇒ Maximum input memory for each channel ⇒ Last input memory for all channels ⇒ Memory of the first exceeding of a limit on each channel ⇒ Recording of the stored data in an auxiliary unit ⇒ Visual and audible signals for warning- and alarm limits
Weight:	ca. 0,5 kg (1 lb.)
Display:	LCD with background illumination 2 x 16 digits, size of type 8 mm
Power supply:	12 V DC (min. 11,8 V, max. 15 V)
Power consumption:	0,5 A max.
Excess-voltage protection:	Short-circuiting of supply above 20 V (fuse blows).
Fuse:	3 A
Alarm output:	12 V DC, 0,5 A max.
Operating temperature:	0°C to 60°C

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 11 -
---------------------------	-----------	--------------	--------------------	----------------

Storage temp.:	-20°C to +60°C	
Vibration limits:	amplitude:	max. 0,36 mm
	acceleration:	max. 5 g
	frequency:	10 to 500 Hz
Shock limits:	acceleration:	max. 50 g
	duration of shock:	11 ms
Permanent shock limit:	acceleration:	max. 10 g
	duration of shock:	6 ms

Sensor inputs:

4 x input for thermo couple NiCrNi (type K):

measuring range:	-20°C to +999°C at 25°C terminal temperature
accuracy:	± 5°C
application:	cylinder head temperature (CHT), exhaust gas temperature (EGT)

2 x input resistance thermometer (PT 100):

measuring range:	-20°C to +203°C
accuracy:	± 2°C
application:	air-, coolant temperature (2-stroke), oil-, cylinder head temperature (912 / 914)

1 x input oil pressure pick-up:

measuring range:	0 to 10 bar
accuracy:	± 0,2 bar
application:	oil pressure (912 / 914)

1 x rpm input:

measuring range:	1030 to 9990 rpm
accuracy:	± 10 rpm

- NOTE: For configuration on 912 / 914 **one** impulse per revolution, but for all other configurations **6** impulses per revolution are required for correct rev-counting.

hour meter:

measuring range:	0,0 to 3200 h
indicating range:	0,0 to 999,9 h (after 999,9 h change to Zero)
accuracy:	± 2 sec/h at operation without interruption

Page - 12 -	Date 1997 10 01	OM <i>FLYdat</i>	Reference	Modification-No. - 0 -
----------------	--------------------	---------------------	-----------	---------------------------

5.1) Warn- and alarm limits

If the **FLYdat** has been configured by a distributor, the following limits are stored.

◆ NOTE: Please, pay attention to limits as specified in the Operator's Manual for engine.

Don't run engine above these limits.

Engine type 447 and 503 UL

Display	Unit	Warn limit	Alarm limit
Engine speed (rpm)		6800	7000
Exh. gas temp. .. (°C)		650	680
Cyl. head temp. . (°C)		250	275
Ambient air temp.(°C)		40	50

Engine type 582 UL DCDI

Display	Unit	Warn limit	Alarm limit
Engine speed (rpm)		6800	7000
Exh. gas temp. .. (°C)		650	680
Cyl. head temp. . (°C)		165	180
Coolant temp. (°C)		85	95
Ambient air temp.(°C)		40	50

Engine type 618 UL

Display	Unit	Warn limit	Alarm limit
Engine speed (rpm)		7000	7300
Exh. gas temp. .. (°C)		650	680
Cyl. head temp. . (°C)		165	180
Coolant temp. (°C)		85	95
Ambient air temp.(°C)		40	50

Engine type 912

Display	Unit	Warn limit	Alarm limit
Engine speed (rpm)		5800	6000
Exh. gas temp. .. (°C)		880	900
Cyl. head temp. . (°C)		150	160
Oil temperature. (°C)		140	150
Oil pressure max.(°C)		6,0	8,0
Oil pressure min. (bar)		2,0	1,0

Engine type 914

Display	Unit	Warn limit	Alarm limit
Engine speed (rpm)		5800	6000
Exh. gas temp. ... (°C)		950	1000
Cyl. head temp. .. (°C)		135	150
Oil temperature .. (°C)		130	145
Oil pressure max.(bar)		6,0	8,0
Oil pressure min. (bar)		2,0	1,0

6) Installation


6.1) General information

Prior to the installation of the **FLYdat** look for a suitable location in the cockpit, taking into consideration the following:

- ⇒ protection against too high temperatures
- ◆ NOTE: The unit operates flawless up to the max. operating temperature of 60°C.
- ⇒ protection against excessive vibrations and shock loads (see Technical Data for permissible values). For certain conditions it might be necessary for keeping within specifications, to install the unit vibration damped.
- ⇒ Protection against dampness and any kind of gasoline and oil wetting.
- ⇒ Ensure clear and distinct visibility, direct and without glare
- ⇒ Easy maintenance

In consideration of reliability and durability try to meet all these conditions.

6.2) Outline dimensions of the Flydat

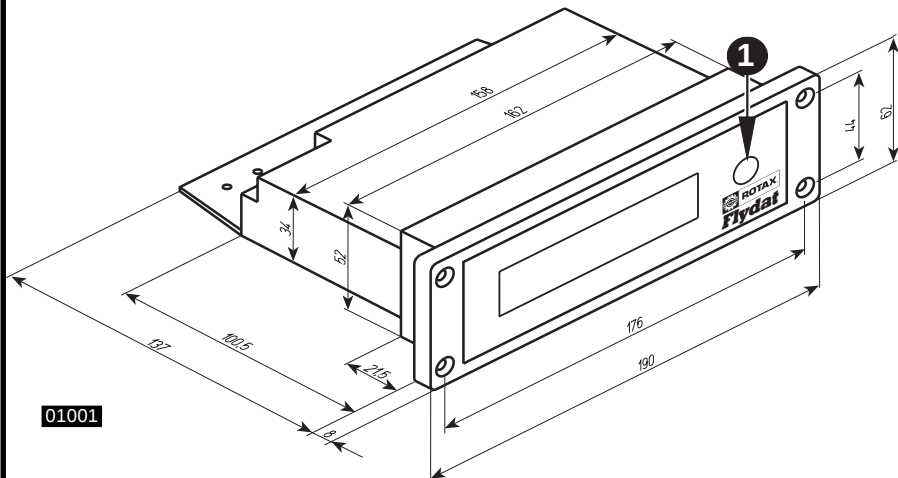

- ◆ NOTE: Attachment screws for the **FLYdat** are not in the supply scope.

Modification-No.	Reference	OM	Date	Page
- 0 -		FLYdat	1997 10 01	- 15 -

6.3) Electric Connections

The plug receptacles with interlocking, for connection of the sensors and power supply are located on the backside. For the wiring of sensors and terminals consult the wiring diagram.

The fitted socket ❶ is used to program (datatransfer) the *FLYdat* for the different engine types.

This programming is performed exclusively by the Bombardier-Rotax distributor. Therefore, the socket ❶ is of no significance for the user.

■ **ATTENTION:** Manipulation on this terminal ❶ or to plug-in any connection whatsoever, is not allowed.

6.4) Sensor kits

3 different sensor kits, especially assembled for each engine type are offered from Bombardier-Rotax.

Version LC (liquid cooled 2-stroke engines)

Version AC (aircooled 2-stroke engines)

- ⇒ 2 sensors for exhaust gas temperature (EGT)
- ⇒ 2 spark plug seat sensors for cylinder head temperature (CHT)
- ⇒ 2 temperature pick-ups for air and coolant temperature

(version AC with 1 air temperature sensor only)

- ⇒ 2 sealing rings for EGT sensors
- ⇒ 2 support angles for CHT sensors
- ⇒ 2 cable straps
- ⇒ 1 front plate alternatively with temperature display in °C of °F
- ⇒ 1 sticker with wiring diagram

Version 912 / 914

- ⇒ 4 sensors for exhaust gas temperature (EGT)
- ⇒ 2 temperature pick-ups, for cylinder head and oil temperature
- ⇒ 1 pick-up for oil pressure
- ⇒ 4 sealing rings for EGT sensors
- ⇒ 4 welding collars M8x1 for EGT sensors
- ⇒ 1 front plate, alternatively with temperature display in °C or °F
- ⇒ 1 sticker with wiring diagram

Page - 16 -	Date 1997 10 01	OM <i>FLYdat</i>	Reference	Modification-No. - 0 -
----------------	--------------------	---------------------	-----------	---------------------------

6.5) Installation of the sensors

At installation of the sensors take into consideration the following:

- ⇒ Route sensor lines to be protected against excessive temperatures.
- ⇒ Route sensor lines free of vibrations, but with some flexibility.
- ⇒ Sensor lines to be without kinks and must not chafe.
- ⇒ The threads of the EGT sensors and pick-up of coolant have to be greased with Loctite ANTI-SEIZE, to ensure troublefree removal.
(see tightenig torque chart).

Shortcomings in these points can result in false readings, interruption of lines or the ruin of pick-up lines and sensors.

◆ **NOTE:** The sensors are furnished by the supplier with pick-up lines of 2 m (6' - 6") length, but can be extended to a max. length of 4 m (13').

Thermocouples NiCrNi (type K) to be extended with NiCrNi resistor cables only. Connections have to be soldered and insulated, preferably by shrink tube.

Never establish connections by clamping, danger of false reading due to higher contact resistance. NiCrNi resistor cables are available in a specialist store or from your local Bombardier-Rotax dealer.

All other sensors can be extended by suitable stranded copper wire.


■ **ATTENTION:** Always bear in mind, you are dealing with measuring devices when you install sensors, and handle these sensitive components carefully.
For any question, please contact your local Bombardier-Rotax distributor.

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 17 -
---------------------------	-----------	--------------	--------------------	----------------




01002

EGT Sensor

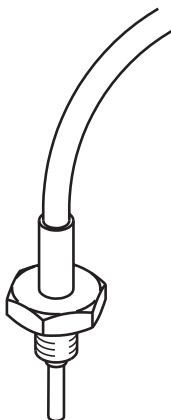


01004

air-,coolant-Sensor
CHT- Sensor (912 / 914)
oil temp.-Sensor (912 / 914)



01005

CHT Sensor

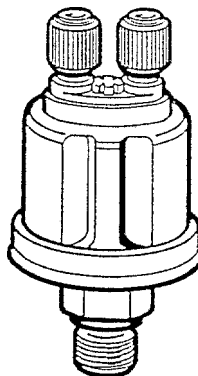

01007

oil pressure pick-up


Tightening torques:

EGT- sensor 20Nm 177in.lb. + LOCTITE Anti Seize
oil pressure pick-up 15Nm 133in.lb. + LOCTITE 603
CHT- sensor (912 / 914) 15Nm 133in.lb. + LOCTITE 221
oil temp.- sensor (912 / 914) 15Nm 133in.lb. + LOCTITE 603
coolant temp.- sensor 6Nm 53in.lb. + LOCTITE Anti Seize
air temp.- sensor 6Nm 53in.lb. + LOCTITE 221

■ ATTENTION: All components, liable to come off during operation,
have to be secured against loss!

6.6) Installation plan for the individual sensor kits liquid cooled 2-stroke engines

(Illustration shows engine type 582 UL)

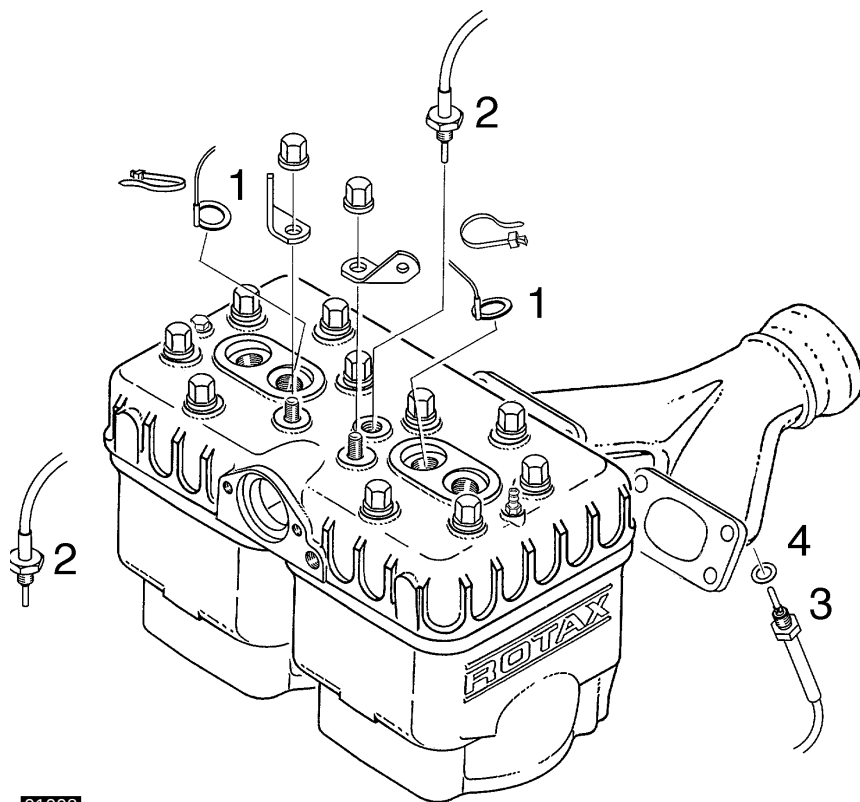


01008

- 1) Sensor at spark plug seat (CHT)
- 2) Air- and liquid temperature sensor
- 3) EGT-sensor
- 4) Sealing ring

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 19 -
---------------------------	-----------	--------------	--------------------	----------------

Aircooled 2-stroke engines



(Illustration shows engine type 503 UL)

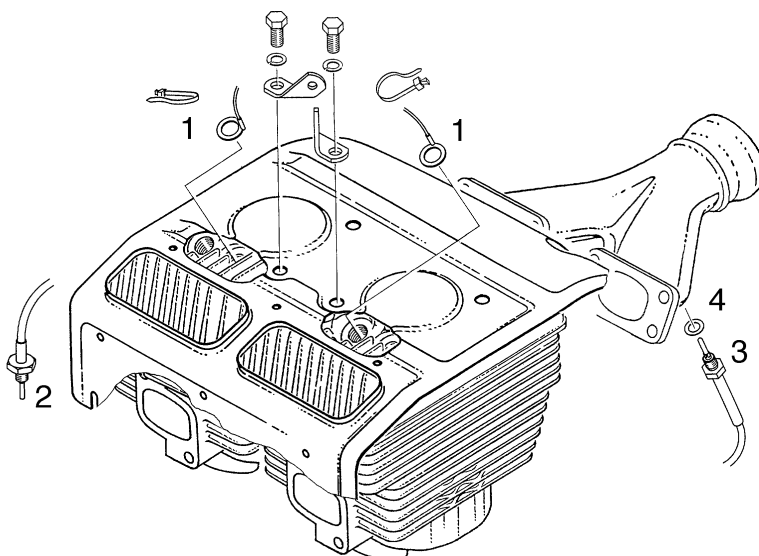

01009

- 1) Sensor at spark plug seat (CHT)
- 2) Air temperature sensor
- 3) EGT sensor
- 4) Sealing ring

◆ NOTE: For engine type 447 UL, 503 UL, 582 UL and 618 UL, exhaust manifolds specially prepared for installation of EGT sensors, are readily available.

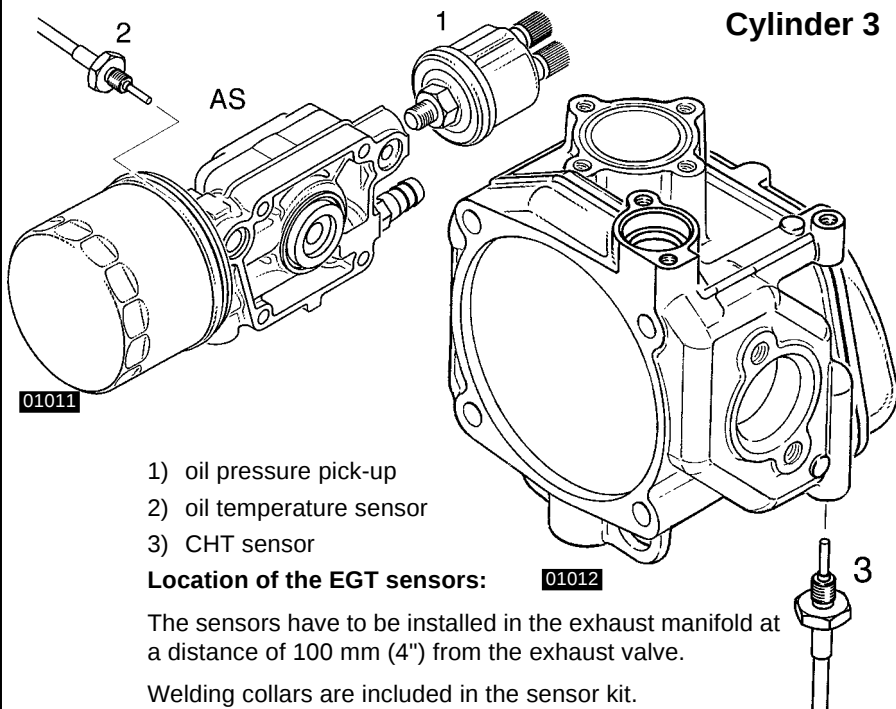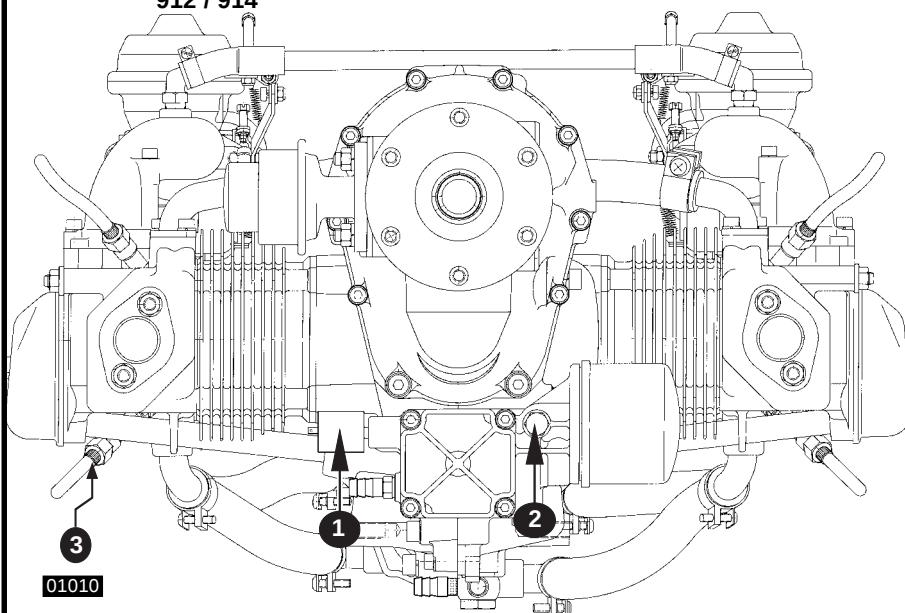

6.7) Signalling device

The **FLYdat** is furnished with an alarm output, which acts as the positive (+) terminal of 12V output.

◆ NOTE: A short-circuit on this output will blow the fuse of the unit.


If need be, a lamp and/or some signalling device, acoustic or visual, may be connected.

■ ATTENTION: The maximum load must not exceed 0,5 A.

At installation, the same considerations as for the Flydat unit should be taken!

Page - 22 -	Date 1997 10 01	OM FLYdat	Reference	Modification-No. - 0 -
----------------	--------------------	--------------	-----------	---------------------------


6.8) Wiring diagram for different engine types:
plug receptacles

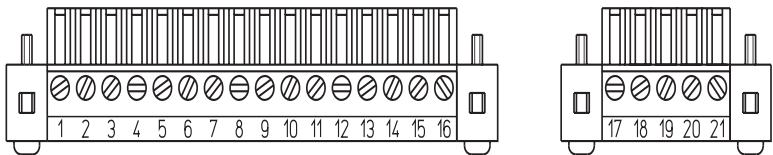

01014

Legend: EGT Exhaust gas temperature
CHT Cylinder head temperature


Standard version

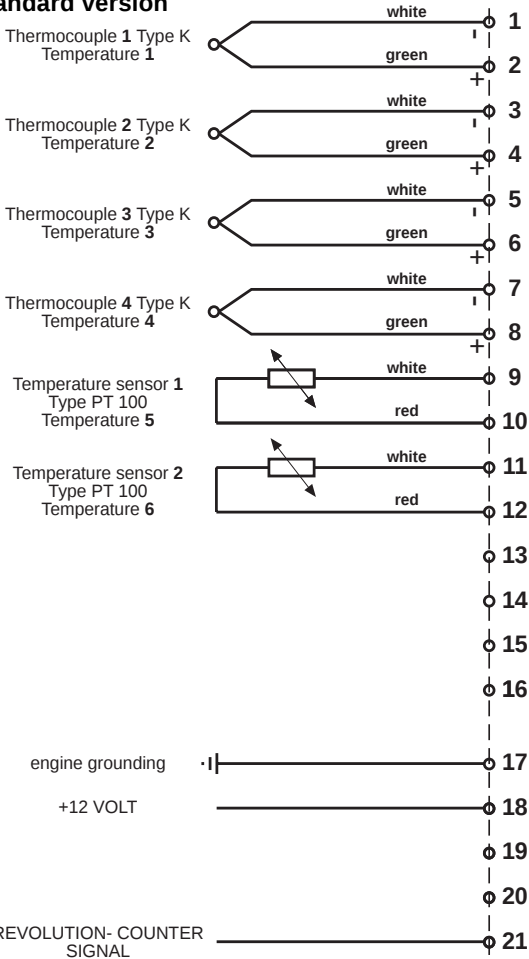

01081


Modification-No.	Reference	OM	Date	Page
- 0 -		FLYdat	1997 10 01	- 23 -

Engine type 582 UL, 618 UL

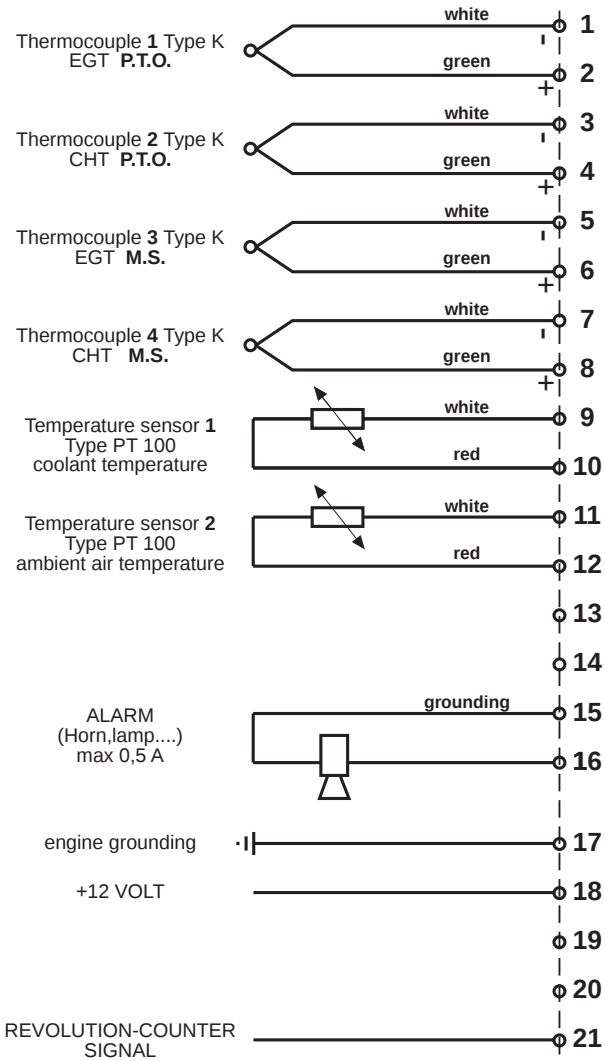


01082

Engine type 447 UL, 503 UL

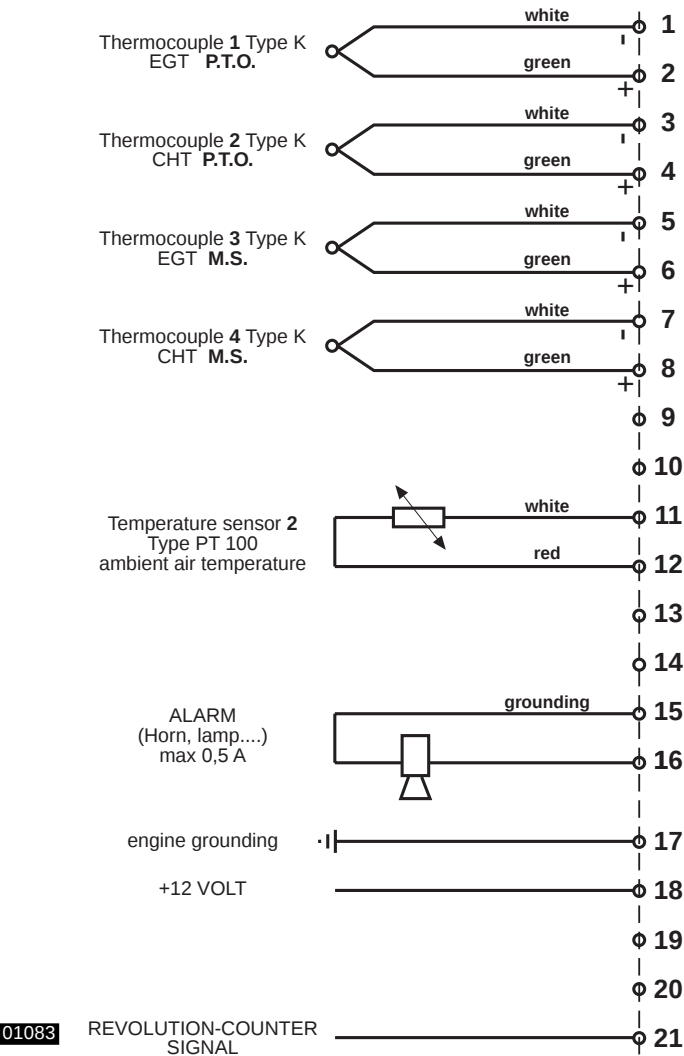

Engine type 912 / 914

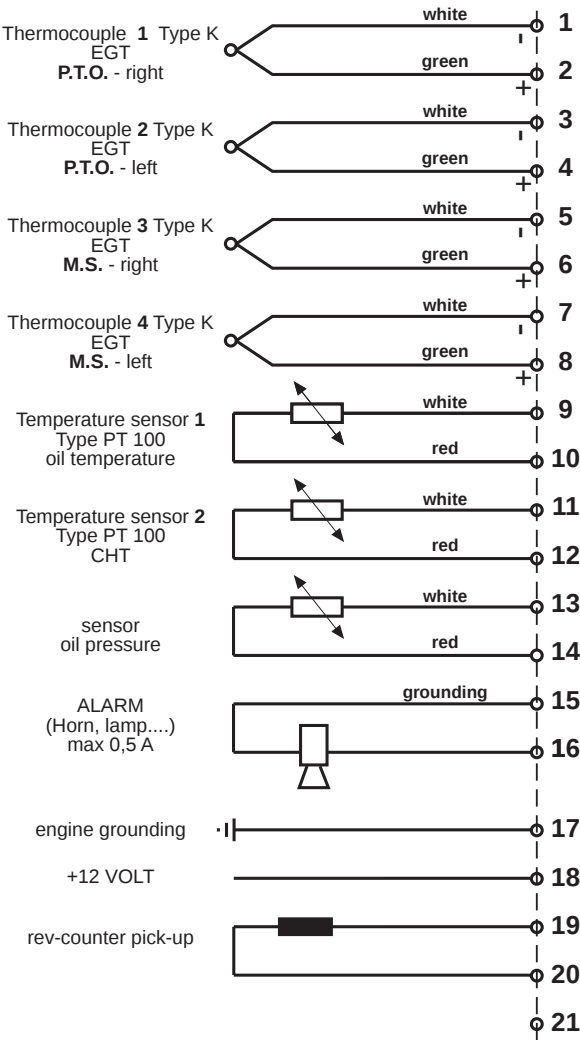

01084

◆ NOTE:

Included in the sensor kit are stickers with the relevant wiring diagram. The sticker may be glued to the Flydat case, to facilitate the connecting of the particular sensors.

7) Operation

7.1) Initial start-up

Prior of putting the **FLYdat** into operation make sure that all the sensor lines and the supply cable are connected correctly.

Consult wiring diagram and the chapter electric connections for the particular engines.

Not until all the connections are checked, supply the **FLYdat** with voltage.

■ **ATTENTION:** The wrong polarity of the supply will blow the fuse.

With adequate voltage and correctly connected supply, the

⇒ background illumination must glow, and

⇒ readings are indicated on the **FLYdat** .

If the particular sensor lines are not connected properly the **FLYdat** will show false or blinking readings.

If the **FLYdat** won't operate flawless, follow up tips regarding supply, faulty sensor lines and various error indications.

7.2) Reaction at start

After connecting the unit on power it will perform an autotest. With no errors detected, the version of software applied and the programmed temperature unit (°C or °F) will be indicated.

The display might read as follows:

„V1.22 °C“ or V1.22 °F“

NOTE: This message will remain for 6 sec. on the display.

Afterwards call for a maintenance, possibly due, might appear for 30 sec., triggered by exceeding the period of operation or a limit. With other words, if one or more limits have been exceeded or the TBO specified is shorter than operation time since the last TBO service, then the maintenance request will appear.

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 27 -
---------------------------	-----------	--------------	--------------------	----------------

The call for maintenance appears as follows:

„Service!“

- ◆ NOTE: But no indication for which engine type the **FLYdat** was programmed will appear on the display.

All the messages appear in 8 digits on the top line and are in English only.

After the various messages, the alarm output will be activated for 1 sec. And finally, the **FLYdat** starts the reading operation with the actual values appearing on the display.

Page - 28 -	Date 1997 10 01	OM FLYdat	Reference	Modification-No. - 0 -
----------------	--------------------	--------------	-----------	---------------------------

- **ATTENTION:** If the call for "**Service**" appears after switching on the unit, contact the next Bombardier-Rotax dealer without delay. He will find out the reason for the maintenance request.

7.3) Possible display

Indication of engine speed

The r.p.m. reading is in 4 digits and appears from 1030 r.p.m. onwards on the display. Recording of the speed down to 768 r.p.m. ending with last input memory.

- ◆ **NOTE:** I.e. even with 0000 on the display (actual speed 1030÷ 768 r.p.m.) a storage allocation is feasible with 0000 in the last input memory.

Indication of operating time

The number of operating hours is 4 digits with the resolution of 0,1 hour on the display.

As only 4 digits are at disposal, time of operation is indicated up to 999,9 hours followed by starting at 0,0 hours again.

The recording of the time of operation is at engine speed down to 768 r.p.m. on the condition of a previous engine speed above 1030 r.p.m.

- ◆ **NOTE:** The **FLYdat** is capable to pick-up operating periods up to 3276,7 h at correct overflow registration and can record a total running time of up to 9999,9 hours.

Time between overhaul must not be longer than 3000 h, leaving a safety margin of 276,7 hours.

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 29 -
---------------------------	-----------	--------------	--------------------	----------------

Temperature indication (Exhaust gas-, cylinder head-, oil- and air temperature)

The temperature display is in 3 digits with a resolution to 1°C or 1°F or 10°F.

- ◆ **NOTE:** As stated previously at configuration, the temperature indication is either in °C or in °F. As only 3 digits are at disposal, the indication of the exhaust gas temperature in °F shows only 1/10 of its actual value on the display, i.e. indication °F x 10 = actual exhaust gas temperature in °F.

On engine type 912/914 the indication of the exhaust gas temperature is alternatively from one line of cylinders to the other cylinder line (see display allocation). But the control of the limits is for all 4 EGT's simultaneously.

Indication of oil pressure (on engine 912 / 914 only)

Display of the oil pressure in 3 digits with a resolution of 0,1 bar. The oil pressure gauge is furnished besides the generally fitted max. limit control, additionally with a minimum pressure control.

The control of the minimum oil pressure is linked to the circuit 5 sec. after (for physical reasons) reaching an engine speed of at least 1030 r.p.m.

Control of the max. oil pressure without time-delay.

- ◆ **NOTE:** If during the period of storing, the limits of both, the max. and min. oil pressure are exceeded, only the value of the oil pressure minimum is stored in the memory of 1st exceeding of limit, as only one memory cell is at disposal.

7.4) Control of readings

The **FLYdat** can be programmed by the authorized dealer for different warn- and alarm limits, depending on engine type.

Distinguish between three ranges of readings control:

⇒ **green range** (standard operation).

All readings are below or above (min. oil pressure) the warn limits programmed.

⇒ **yellow range** (exceeding of warn limits)

If one or more readings exceed the programmed warn limit, then the reading appears flashing on the display, and simultaneously the alarm output is periodically (0,25 sec.) switched on and off, until no reading exceeds warn limit.

⇒ **red range** (exceeding of alarm limits)

If one or more readings exceed the programmed alarm limit, then the readings appear flashing on the display and simultaneously the alarm output is permanently activated until no reading exceeds the warn limit.

■ **WARNING:** Disregard of the warn- and alarm signals might result in injuries or endanger the life of operator or third party.

◆ **NOTE:** The reading operation of the **FLYdat** remains active, even when exceeding limits, as long as it is supplied with the required voltage.

The control of limits responds if picked-up readings are on or above or below (oil pressure) the programmed limits.

Modification-No. - 0 -	Reference	OM <i>FLYdat</i>	Date 1997 10 01	Page - 31 -
---------------------------	-----------	---------------------	--------------------	----------------

7.5) Data recording in operation

Maximum input memory

The **FLYdat** stores the highest reading of each channel.

Last input memory

The **FLYdat** forms from each sort of readings (from max. 8 channels) the maximum, and with each 0,1 h (6 min) step of the hour-counter the maximum is stored in a ring-type puffer. At an engine stop the maximum values are stored too and marked for identification.

With this identification mark you can distinguish between regular 6 minutes intervals and engine stop.

Criteria for identification of an engine stop:

- ⇔ Engine speed below 768 r.p.m.
- ⇔ Breakdown of voltage supply

The size of the ring-type puffer caters for the storage of 20 maximum input records on 8 channel each, plus time of operation.

Memory of the first exceeding of a limit

In case of exceeding an alarm limit, the reading and time of operation to go with, is stored of each channel, but at the first time of exceeding only.

- ◆ NOTE: The sorting and printing of memory contents is possibly only by **RDAT** and **CADAT**.

Page - 32 -	Date 1997 10 01	OM <i>FLYdat</i>	Reference	Modification-No. - 0 -
----------------	--------------------	---------------------	-----------	---------------------------

7.6) Report of errors

EEProm Test

At start of operation of the *FLYdat* , the data composition of the integrated EE-Prom is checked first. If the check proves negative, the error will be indicated on the display for c. 30 sec.

"E2 Error"

Then the *FLYdat* is not in working order and has to be newly programmed at a service place. The successive display of temperature unit (°C of °F) is of no significance in this case.

◆ NOTE: With the EE-Prom faulty, a service request might follow.

Call for Service

In the following cases a call for engine maintenance will appear on the display:

- ⇒ one or more alarm limits have been exceeded,
- ⇒ the reading on the meter of the operating hours has surpassed the programmed TBO.

The maintenance message reads as follows:

"Service!"

This message will be on the display for c. 30 sec.. An engine maintenance has to be carried out at a service place.

Modification-No. - 0 -	Reference	OM <i>FLYdat</i>	Date 1997 10 01	Page - 33 -
---------------------------	-----------	---------------------	--------------------	----------------

Defective sensor lines

An interruption or short-circuit of a sensor line won't activate the alarm output, but will point out incorrect reading on the display as follows:

Indication of the specific reading on the LC Display with sensor line interrupted			
sensor line	Engine type		
	912 , 914	447 , 503 UL	582 , 618 UL
RPM	0	0	0
EGT	blinking	blinking	blinking
CHT	blinking	blinking	blinking
AIR		blinking	blinking
WATER			blinking
Oil Temp	blinking		
Oil Press	blinking		

01098

The value of the reading indicated blinking, is not correct

Indication of the specific reading on the LC Display with short circuit in sensor line			
sensor line	Engine type		
	912 , 914	447 , 503 UL	582 , 618 UL
RPM	0	0	0
EGT	Terminal temp.	Terminal temp.	Terminal temp.
CHT	blinking	Terminal temp.	Terminal temp.
AIR		blinking	blinking
WATER			blinking
Oil Temp	blinking		
Oil Temp	blinking		

01098

The value of the indicated blinking is not correct.

◆ NOTE: **Terminal Temperature** is the temperature of the plug receptacles and corresponds with ambient air temperature.

- ◆ **NOTE:** Definite defects of sensors won't activate maintenance request.
- An intermittent sensor defect can lead to falsified readings, exceeding of warn- and alarm limits, activating of alarm output and triggering of maintenance request.

7.7) Fuse of unit

Type of fuse: Automotive, 3 A current rating (violet identification colour). The fuse is located on the backside of **FLYdat**.

The fuse fitted can blow with the:

- ⇒ Supply voltage too high
- ⇒ Wrong polarity of supply voltage
- ⇒ Current at alarm output in excess of 500 mA

Easy renewal of a blown fuse by withdrawal and exchange.

- **WARNING:** At exchange, use only fuse of same size and current rating.

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 35 -
---------------------------	-----------	--------------	--------------------	----------------

8) Service and Distribution Partners

► Authorized DISTRIBUTORS and SERVICE CENTERS

for ROTAX Aircraft engines *Edition: 1997 01 01*

1) EUROPE

AUSTRIA:

► **HB - FLUGTECHNIK GES.M.B.H.**

Dr. Adolf Schärf Str. 44

A-4053 HAID

Tel.: 07229 / 79104/79117, Fax: 07229 / 79104 15

Contact person: Ing. Heino Brditschka

BULGARIA:

► **GERGANOV - AIRCRAFT EINGINES LTD.**

25B-Post 20, 23 peh. Shlp. polk Blvd.

BG-6100 KAZANLAK

Tel.: 431 / 27 247, Fax: 431 / 23 777

Contact person: Radosslav D. Gerganov

CROATIA / former YUGOSLAVIA (except SLOVENIA):

► **SHAFT D.O.O.**

B.L. Mandica 161 a

HR-54000 OSIJEK

Tel. + Fax: 054 / 760 - 046

Contact person: Ing. Ivan Vdovjak

CZECHIA:

► **I.F.M. GRAMPELHUBER**

Skroupova 9

CS-50197 HRADEC KRALOVE

Tel.: 049 / 56 30 127, Fax: 049 / 56 30 226

Contact persons: Ing. Samal / Ing. Halek

DENMARK / THE NETHER- LANDS:

► **FLIGHT-CENTER**

Flugplatz

D-27777 GANDERKESEE, GERMANY

Tel.: 04222 / 3789, Fax: 04222 / 6042

Contact person: Robert Heilig

**SERVICE-CENTER of FLIGHT-
CENTER in the NETHERLANDS:**

**DRIESSEN SCHOOL OF
SKYRIDERS**

Arendvej 13, Luchthaven Lelystad

NL-8218 PE LELYSTAD

Tel.: 3202 / 88 601, Fax: 3202 / 88 714

Contact person: Eddy Driessen

**SERVICE-CENTER OF FLIGHT-
CENTER IN DENMARK:**

DANSK MICROFLY SERVICE

Sozzivaenget 8

DK-2680 SOLROD

Tel. + Fax: 53 14 30 60

Contact person: Hans P. B. Larsen

FINLAND / NORWAY/ SWEDEN/ ESTONIA/ LATVIA / LITHUANIA

BOMBARDIER NORTRAC LTD.

Box 8039, FIN-96101 ROVANIEMI

Tel.: 16 320 8111; FAX: 16 320 8200

E-mail: order@bombardier.se

Contact person: Kari Sorjonen

FRANCE / BELGIUM / MONACO / LUXEMBURG:

► **AVIREX**

Aérodrome de Dreux

F-28500 VERNOUILLET

Tel.: 02 37 42 30 09, Fax: 02 37 46 26 86

Contact person: Philippe Gueguen

**SERVICE-CENTERS of AVIREX in
FRANCE:**

for zone 01-02-03-04:

AVIREX SHOP

Aérodrome de Dreux

F-28500 VERNOUILLET

Tel.: 02 37 42 30 09, Fax: 02 37 46 26 86

Contact person: Thierry Fontaine

for zone 05:

DELTA AQUITAINE DIFFUSION

Base Saint Exupéry

F-47360 MONPEZAT D'AGENAIS

Tel.: 05 53 08 81, Fax: 05 53 95 01 02

Contact person: Philippe Bouchera

**SERVICE-CENTER of AVIREX for
BELGIUM and LUXEMBURG:**

AVIREX

Aérodrome de Dreux

F-28500 VERNOUILLET

Tel.: 02 37 42 30 09, Fax: 02 37 46 26 86

Contact person: Philippe Gueguen

GERMANY:

for postcodes 0-5-6-7-8-9:

► **FRANZ AIRCRAFT ENGINES VERTRIEB GMBH**

Am Eckfeld 6e, D-83543 ROTT AM INN
Tel.: 08039 / 9035-0, Fax: 08039 / 9035-35
Contact person: Eduard Franz

for postcodes 1-2-3-4:

► **FLIGHT-CENTER**

Flugplatz
D-27777 GANDERKESEE
Tel.: 04222 / 3789, Fax: 04222 / 6042
Contact person: Robert Heilig

GREAT BRITAIN / IRELAND / ICELAND:

► **SKYDRIVE LTD.**

Burnside, Deppers Bridge
LEAMINGTON Spa. CV 33 OSU
Tel.: 1926 / 612 188, Fax: 1926 / 613 781
E-mail: cyclonehovercraft@avnet.co.uk
Contact person: Nigel Beale

GREECE / CYPRUS:

► **KINISI**

Ellis 1 str. , GR-14563 KIFISSIA
Tel.: 01 / 620 8611; Fax: 01/ 625 0026
Contact person: Michael Poulikakos
Nick Siganos

HUNGARY:

► **HALLEY**

Baktai út 45, P.O. Box 425
H-3300 EGER
Tel.: 36 / 313-830, Fax: 36 / 320-208

ITALY / MALTA:

► **ICARO MOTORI S.R.L.**

Via Emilia, 61/B
I-27050 REDAVALLE (PV)
Tel.: 0385 / 74 591, Fax: 0385 / 74 592
Contact person: Corrado Gavazzoni

SERVICE-CENTERS of ICARO :

CALVI FRANCESCO

Via Trieste No. 35
I-27010 SAN GENESIO (PV)
Tel.: 0330 / 519894

SERGIO CHIAVEGATO

Via S. Gabriele No. 30
I-37063 ISOLA DELLA SCALA (VR)
Tel.: + Fax: 045 / 6649013

C.U.P. CENTRO ULTRALEGGERI

PARTENOPEO

DI FABRIZIO PISANI

Via Duca d'Aosta No. 65, I-80026 CASORIA
(NA)
Tel. 081 / 540 3184 - 0330 / 876096
Fax: 081 / 425 125

EUROFLY SRL

Via Ca' Onorai No. 50
I-35015 GALLIERA VENETA (PD)
Tel. + Fax: 049 / 5965464

FERRARI ULM DI FERRARI GIANNI

Via Garibaldi No. 110
I-35040 CASTELBALDO (PD)
Tel.: 0425 / 57316, Fax: 0425 / 546422

MICROFLIGHT

Via Santi No. 8
I-43031 BAGANZOLA (PR)
Tel. + Fax: 0521 / 601414

MOTODELTA

Via Abruzzi No. 13/B
I-27029 VIGEVANO (PV)
Tel. + Fax: 0381 / 345465

PIANO FEDERICO

Campo di Volo Località San Giacomo
I-09010 SILIQUA (CA)
Tel.: 0781 / 781000

POLARIS MOTOR SRL

Fr. Valdichiascio
I-06024 GUBBIO (PG)
Tel.: 075 / 920034, Fax: 075 / 920029

TRI FLY DI TRICERRI FRANCESCO

Via F. Bena No. 14
I-13044 CRESCENTINO (VC)
Tel.: 0161 / 841 057, Fax: 0161 / 920 029

POLAND:

► **FASTON LTD.**

ul. Szeroka 2
PL-05-860 PLOCHOCIN
Tel.: + Fax: 22 / 40 01 96
Contact person: Wojtek Madry,
Manager

ROMANIA:

► **S.C. BERIMPEX S.R.L.**

Str. Dr. Taranu Grigore No. 8, Ap. 1, Sector 5
R-76241 BUCHAREST
Tel.: 1-210 49 83; Fax: 1-312 56 48
Contact person: Dr. Christian Berar

SLOVAKIA:

► **I.F.M. GRAMPELHUBER**

Skroupova 9
CS-50197 HRADEC KRALOVE
Tel.: 049 / 56 30 127, Fax: 049 / 56 30 226
Contact persons: Ing. Samal / Ing. Halek

SLOVENIA:

► **PIPISTREL d.o.o.**

Strancarjeva Ul. 11
5270 AJDOVSCINA
Tel. 065 63 873, Fax: 065 61 263
E-mail: pipistrel@eunet.si
Contact person: Ivo Boscarol

SPAIN / PORTUGAL:

► AVIASPORT S.A.

Almazara 11
E-28760 TRES CANTOS (MADRID)
Tel.: (1) 803 77 11, Fax: (1) 803 55 22
E-mail: aviasport@bscnetwork.es
Contact person: Mariano de Castro

SWITZERLAND / LIECHTEN-STEIN:

► FRANZ AIRCRAFT ENGINES

VERTRIEB GMBH

Am Eckfeld 6e, D-83543 Rott am Inn, GER-MANY
Tel.: 08039 / 9035-0, Fax: 08039 / 9035-35
Contact person: Eduard Franz

SERVICE-CENTER of FRANZ AIRCRAFT ENGINES VERTRIEB GMBH FOR SWITZERLAND AND LIECHTENSTEIN:

FLIEGERSCHULE BIRRFELD AG

Flugplatz, CH-5242 BIRR-LUPFIG
Tel.+ Fax: 056/4448847

TURKEY:

► KLASIK HALI A.S.

Cumhuriyet Mey. 9/B
35210 Heykel, İZMİR
Tel.: (232) 376 87 70, Fax: (232) 328 02 54
Contact person: Tahir Önder, President

2) A M E R I C A

CANADA:

► ROTECH RESEARCH CANADA, LTD.

S 22 C39 RR6 STN MAIN
6235 Okanagan Landing Rd.
VERNON, B.C., V1T 6Y5
Tel.: 604 / 260-6299, Fax: 604 / 260-6269
E-mail: rotech@junction.net

SERVICE-CENTERS of KODIAK in CANADA:

ROTECH RESEARCH CANADA, LTD.

S 22 C39 RR6 STN MAIN
6235 Okanagan Landing Rd.
VERNON, B.C., V1T 6Y5
Tel.: 604 / 260-6299, Fax: 604 / 260-6269
E-mail: rotech@junction.net

USA / CARRIBEAN / CENTRAL

AMERICA / COLOMBIA /

ECUADOR:

► KODIAK RESEARCH LTD.

P.O. Box N 7113
Marlborough House Cumberland Street
NASSAU, BAHAMAS
Tel.: 242 / 356 5377, Fax: 242 322 6784
E-mail: kodiakbs@bahamas.net.bs

SERVICE-CENTERS of KODIAK in USA:

- ALASKA:

ARCTIC SPARROW AIRCRAFT, INC.

1801 E 5th Avenue
ANCHORAGE, AK 94501
Tel.: 907 / 272 - 7001, Fax: 907 / 279 - 6157

- CALIFORNIA:

CALIFORNIA POWER SYSTEMS, INC.

790 - 139th Avenue, #4,
SAN LEANDRO, CA 94578
Tel.: 510 / 357-2403, Fax: 510 / 357 - 4429

- COLORADO:

LEADING EDGE AIR FOILS, INC.

8242 Cessna Drive
PEYTON COLORADO, 80831
Tel.: 719/683-5323, Fax: 719/683-5333

- FLORIDA:

LOCKWOOD AVIATION, INC.

280 Hendricks Way
SEBRING, FL 33870
Tel.: 813/655-5100, Fax: 813/655-6225

- MISSISSIPPI:

SOUTH MISSISSIPPI LIGHT AIRCRAFT, INC.

Route 7, Box 337B
LUCEDALE, MS 39452
Tel.: 601/947-4953, Fax: 601/947-4959

- OHIO:

GREEN SKY ADVENTURES, INC.

2377 Cream Ridge Road
ORWELL, OH 44076
Tel.: 216/293-6624, Fax: 216/293-6321

- WISCONSIN:

JET AIR CORPORATION

1921 Airport Road, Austin Straubel Field
GREEN BAY, WI 54313
Tel.: 414 / 497 - 4900, Fax: 414 / 497 - 2678

SERVICE-CENTER of KODIAK in COSTA RICA:

SAUMA

Calle 20, Avenida 7, Edificio Herrero
SAN JOSÉ DE COSTA RICA
Tel.: 506 / 223 - 9538, Fax: 506 / 221 - 6330
Contact person: Rodrigo Sauma

SERVICE-CENTER of KODIAK in ECUADOR:

AUGUSTO JOUVIN

P.O.Box 09-06-2434
GUAYAQUIL
Tel.: 593 / 4 - 322 965, Fax: 593 / 4 - 314126
Contact person: Augusto Jouvín

Page	Date	OM	Reference	Modification-No.
- 38 -	1997 10 01	FLYdat		- 0 -

SERVICE-CENTER of KODIAK in EL SALVADOR:

AEROTEC

Avda. Las Magnolias 142, Colonia San Benito
SAN SALVADOR
Tel.: 503 / 23 - 2375, Fax: 503 / 24 - 4338
Contact person: Larry Zedan

SERVICE-CENTER of KODIAK in GUATEMALA:

FARRERA EXPORT & IMPORT

18 Avda. A 0-27 Zona 15, Vista Hermosa 2
CIUDAD GUATEMALA
Tel.: 502 / 269 - 2544
Contact person: Jose Ferrera

SERVICE-CENTERS of KODIAK in COLOMBIA:

BERNARDO A. GOMEZ /

AGROCOPTEROS

Calle 11A #50-45, A.A. 1789
CALI
Tel.: 57 / 23 - 306 868, Fax: 57 / 23 - 842 002
Contact persons: Bernardo Gomez (Spanish)
Maximo Tedesco (English)

L.A.G. ULTRALIGHT

Apartado Aereo 60399
MEDELLIN
Tel. + Fax: 574 / 243 - 5411
Contact person: Luis A. Gallo

SERVICE-CENTER of KODIAK in MEXICO:

REFACCIONARIA VERGAS, S.A.

Apdo. Postal #66, Avda. Alvaro Obregon #242
CD. CHETUMAL, Q. ROO, YUCATAN
Tel.: 52 / 983 - 20007, Fax 52 / 983 - 20006
Contact person: Sergio Vargas

SERVICE-CENTER of KODIAK in NICARAGUA:

JENARO LUNA CASTILLO

Frente a Implagsa
LEON
Tel.: 505 / 0311 - 6454, Fax: 505 / 0311 - 3242
Contact person: Jenaro Luna

SERVICE-CENTER of KODIAK in PANAMA:

ULTRALIGHTS DE PANAMA

Apdo. #3405
PANAMA 4
Tel.: 507 / 36 - 0326, Fax: 507 / 36 - 3008
Contact person: Ismael E. Champsaur

ARGENTINA / BOLIVIA / BRAZIL / CHILE / GUYANA / PARAGUAY / PERU / SURINAM / URUGUAY:

► MOTAX-COMERCIAL IMPORTADORA LTDA

Estrada de Jacarepaguá No. 6793 - Freguesia
C.E.P. 22753 - RIO DE JANEIRO (RJ)
Tel.: (21) 447 7376 / 7376, Fax: (21) 447 6098
E-mail: motax@easyline.com.br
Contact person: J.M. Carneiro de Rezende

SERVICE-CENTERS of MOTAX in BRAZIL:

- NORTH:

ULTRASPORT- AERONAVES E MOTORES LTDA.

Rua Vicente Leite 960/302
C.E.P. 60170, FORTALEZA - CEARA
Tel. + Fax: 085 / 272 - 5158
Contact person: Eduardo Campos

- CENTRAL:

ULTRA PLANNA - TAXI AERO LTDA.

Av. Airton Senna, Nr. 2541 - Hangar 20
C.E.P. 22775, Jacarepagua - RIO DE JANEIRO
Tel.: 021 / 325 - 5889, Fax: 021 / 325 - 8197
Contact person: Elio Antonio F. Santos

- SOUTH:

ULTRAMOTORES COMERCIO E MAN. DE MOTORES LTDA.

Rod. Virginia Viel, KM 08 - SUMARE - SP
C.E.P. 13170 SAO PAULO
Tel.: 019 / 873 - 3753, Fax: 019 / 873 - 3510
Repair: Rodovia Virginia Viel KM 1, SUMARE-SP
Contact person: L.C. Goncalves

SERVICE-CENTER of MOTAX in ARGENTINA/CHILE/PERU/BOLIVIA/ URUGUAY:

ULTRALIGHT S.R.L.

Aeropuerto Internacional
1611 - DON TORCUATO
Tel. + Fax: 01 / 748 - 6611
Contact person: Carlos A. Müller, President

3) A U S T R A L I A

► AIRCRAFT ENGINE DISTRIBUTORS PTY. LTD.

P.O. Box 84, Boonah, QLD. 4310
Tel.: (074) 63 2755, Fax: (074) 63 2987
E-mail: austfly@world.net
Contact person: Jim Fenton

SERVICE-CENTER of AIRCRAFT ENGINE DIST.:

DENIS BEAHAN & CO.

P.O. Box 406, ROMA, QLD. 4455
Tel.: (076) 22 2742, Fax: (076) 22 2291

► BERT FLOOD IMPORTS PTY. LTD.

P.O. Box 61, LILYDALE, VICTORIA 3140
Tel.: 03 / 9735 5655, Fax: 03 / 9735 5699
Contact person: Bert Flood

NEW ZEALAND:

► TIPPINS INTERNATIONAL

P.O. Box 192, Tuakau
SOUTH AUCKLAND
Tel.: 09 / 233 - 4898, Fax: 09 / 233 - 4798
Contact person: Murray Tippins

Modification-No.	Reference	OM	Date	Page
- 0 -		FLYdat	1997 10 01	- 39 -

4) A F R I C A

EGYPT:

► SALEM BALLOONS

40 Talaat Harb St., CAIRO
Tel.: (2) 2991 946 / (2) 3038 214, Fax: (2) 3038 214
Contact person: Weaam Salem, General Manager

ANGOLA / BOTSWANA / LESOTHO / MADAGASCAR / MALAWI / MOZAMBIQUE / NAMIBIA / SOUTH AFRICA / SWAZILAND / ZAMBIA / ZIMBABWE:

► AVIATION ENGINES AND ACCESSORIES (PTY) LTD

Private Bag X10021, Edenvale 1610, South Africa
Tel.: 011 / 455 4203/4/5/6/9, Fax: 011 / 455 4499
Contact person: Mike Blyth

SERVICE-CENTER of AVIATION in BOTSWANA:

POWERSERV

Private Bag 62, Maun, Botswana
Tel.: 660 201, Fax: 660 536
Contact person: Mike Bullock

SERVICE-CENTER of AVIATION in NAMIBIA:

WILLEM VAN ZYL

P.O. Box 9622, Eros, Windhoek, Namibia
Tel.: (09264) 811242156, Fax: (09264) 81217615
Contact person: Willem Van Zyl

SERVICE-CENTER of AVIATION in SOUTH AFRICA:

ATREX

P.O. Box 15258, Vlaeberg, CAPE TOWN, 8018
Tel.: (021) 47 - 9410, Fax: (021) 47 - 9773
Contact person: Cecil Link

LINK ENGINEERING

P.O. Box 75134, Lynwood Ridge
0040, South Africa
Tel.: (012) 347 0021, Fax: (012) 347 0153
Contact person: Louis Butler

SOLO WINGS

P.O. Box 214, Gillits, DURBAN, 3603
Tel.: (031) 700 - 2806, Fax: (031) 700 - 5502
Contact person: David Miller

TREVOR DAVIES ENGINEERING (PTY) LTD

T/A Davis Aircraft Corporation
P.O. Box 2474, Cresta, 2118
Tel.: (011) 318 - 2346, Fax: (011) 318 - 1821
Contact person: Trevor Davies

SERVICE-CENTER of AVIATION in ZIMBABWE:

ULTRALIGHT AVIATION

P.O. Box 187, Norton, Zimbabwe
Tel.: (09263) 622 036, Fax: (09263) 622 411
Contact person: Mike Moroney

5) A S I A

CHINA / HONG KONG / MACAO:

► DUEN MU CO.

Unit 10, 10/F, Metro Centro II
21 Lam Hing Street, Kowloon Bay
Kowloon, HONG KONG
Tel.: 2756 5725, Fax: 2754 4774
E-mail: cali@tfhtech.com
Contact person: W. C. Choi

CIS:

► AVIAGAMMA JSCo.

P.O. Box 51, 125 057 MOSCOW
Tel.: 095 / 158 31 23, Fax: 095 / 158 65 73
Contact person: Vladimir Andriytschuk
General Director

SERVICE-CENTERS of AVIAGAMMA:

"Aviakech" JSCo.

443022 Zavodskoe shosse 18
SAMARA, Russia
Tel.: 846 2 51-89-53, Fax: 846 2 34-76-55
Contact person: Ewgoniy Shistorow

for REPUBLIC BELARUS:

MINIAVIA

Minskaja ATB MVL PANH
220065 Aerodromnaja 4, MINSK/BELARUS
Tel./Fax: 0172/255-937
Contact person: Liach Alexander

INDIA:

► GREAVES LIMITED

22-A, Janpath
NEW DELHI - 110 001
Tel.: 11/338 50 61/338 26 53 (Dir.), Fax: 11/37 82 553 Tlx.: 031-62663
Contact person: Wg Cdr S.N. Chhabra
Divisional Manager

SERVICE-CENTERS of GREAVES LTD., New Delhi:

GREAVES LTD

16/3 Ali Asker Road, P.B. No. 113
BANGALORE 560 052
Tel.: 080/22 65 873/22 68 773, Fax: 080/225 3472, Tlx.: 0845-2365
Contact person: Wg Cdr B. Chandran
Dy. Gen. Manager

GREAVES LTD

10-B Madan Mohan, Malviya Marg
LUCKNOW 226 001
Tel.: 0522/283 410/283 406, Fax: 0522/283 067.
Tlx.: 0535-321
Contact person: R.N. Singh
Deputy General Manager

GREAVES LTD

1, Dr V.B. Gandhi Marg, P.B. No. 91
BOMBAY 400 023
Tel.: 022/267 44 07/267 15 24, Fax: 022/267 7850,
Tlx.: 011-82517
Contact person: H.L. Shah
Marketing Manager
Marine Systems Grp.

Page	Date	OM	Reference	Modification-No.
- 40 -	1997 10 01	FLYdat		- 0 -

GREAVES LTD

Thapar House, 25 Brabourne Road, P.B. No. 702
 CALCUTTA 700 001
 Tel.: 033/24 21 459/24 23 805, Fax: 033/24 24
 325, Tlx.: 021-5055/5130
 Contact person: K. K. BARKAR

INDONESIA / MALAYSIA / SINGAPORE:**➤ P.T. ESACON TRADA**

Jl. Wolter Monginsidi 91
 JAKARTA 12180
 Tel.: (021) 724 5906 / 739 8109
 Fax: (021) 725 1301, E-mail:
 IR.Nyono@global.net.id

IRAN:**➤ TASHAR CO. LTD.**

54 Khaled Eslamboli Ave., TEHERAN 15117
 Tel.: 21 / 871 4787 / 872 3222, Fax: 21 / 872 2260
 Contact persons: Morthesar Sadjat
 Jusufi Nejjadan

ISRAEL:**➤ CONDOR-AVIATION INDUSTRIES LTD.**

34 Arlozorov St., IL-52481 RAMAT - GAN
 Tel.: 03 / 672 484 / 050-290 189
 Fax: 03 / 6 723 753
 E-mail: condor@netvision.net.il
 Contact person: David Viernik

J A P A N :**➤ JUA, LTD.**

1793 Fukazawa, Gotemba City
 SHIZUOKA PREF 412
 Tel.: 550 / 83 8860, Fax: 550 / 83 8224
 Contact person: Yoshihiko Tajika, President

KOREA:**➤ HWA YOUNG MEDICAL & SCIENCE CO.**

401 KeumKang Building
 1439-1, Seocho 1 dong, seocho-ku, SEOUL 137-071
 Tel.: 02 / 3472-0271-5,
 Fax: 02 / 3472-0276 (02/3471-4753)
 Contact person: John Lee, President

PAPUA NEW GUINEA:**➤ BERT FLOOD IMPORTS PTY. LTD.**

P.O. Box 61, LILYDALE, VICTORIA 3140
 AUSTRALIA
 Tel.: 03 / 9735 5655, Fax: 03 / 9735 5699,
 Contact person: Bert Flood

PHILIPPINES:**➤ WESTERN PACIFIC AVIATION COMPANY**

RPMCI Hangar Manila Domestic Airport
 P.O. Box 7633 Airport Airmail
 Exchange Office, Domestic Road Pasay City
 Metro Manila
 Tel.: 2/832-3375, Fax: 2/833-0605
 Contact person: Rolando P. Moscardon

TAIWAN:**➤ TAIWAN MAXIEM INDUSTRIES**

7/1 Tung Feng Street, TAIPEI, 10 651
 Tel.: 2 / 704 6163, Fax: 2 / 702 84 85
 Contact person: Lester Lin

THAILAND:**➤ JONES COMPANY LIMITED**

942/20-21 Rama 4th Road
 P.O. Box 686
 BANGKOK
 Tel.: 2 / 233 9088 / 233 3628, Fax: 2 / 238 5079
 Contact person: Kit Chong

UNITED ARAB. EMIRATES:**➤ AL MOALLA**

P.O. Box 7787
 ABU DHABI
 Tel.: 2 / 723 248, Fax: 2 / 788 073
 Contact person: Hussain Al Moalla

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 41 -
---------------------------	-----------	--------------	--------------------	----------------

Blank page

Page - 42 -	Date 1997 10 01	OM <i>FLYdat</i>	Reference	Modification-No. - 0 -
----------------	--------------------	---------------------	-----------	---------------------------

9) Conditions of warranty valid for the *FLYdat* at use on non-certified Rotax aircraft engines.

9.1) Period of warranty

BOMBARDIER-ROTAX as manufacturer, warrants through their authorized BOMBARDIER-ROTAXdistributors FROM THE DATE OF SALE TO THE FIRST CONSUMER, every *FLYdat*, sold as NEW AND UNUSED, and delivered by an authorized BOMBARDIER-ROTAX distributor for a period of not more than:

-  9 consecutive months for private use owners
-  or 12 consecutive month from date of shipment of the manufacturer
-  or the first 150 operation hours.

9.2) Tasks performed by an authorized BOMBARDIER-ROTAX distributor

The authorized BOMBARDIER-ROTAX distributor will, at its option, repair and/or replace components defective in material and/or workmanship under normal use and service, with a genuine BOMBARDIER-ROTAX component without charge for parts or labour, during said warranty period. All parts replaced under warranty become the property of BOMBARDIER-ROTAX.

9.3) Condition to have warranty work performed

You must present to an authorized BOMBARDIER-ROTAX service-center, the hard copy of the BOMBARDIER-ROTAX warranty registration card and/or proof of purchase delivered to the customer from the selling dealer at time of purchase.

9.4) Exclusion - not covered by warranty:

- ✎ Normal wear on all items
- ✎ Replacement parts and/or accessories which are not genuine BOMBARDIER-ROTAX parts and/or accessories.
- ✎ Damage resulting from the installation of parts other than genuine BOMBARDIER-ROTAX parts
- ✎ Damage caused by failure to provide proper maintenance as detailed in the User's Guide. The labour, parts costs of all maintenances services and adjustment will be charged to the owner.
- ✎ If **FLYdat** used in aircraft designed and/or used for racing or commercial purposes.
- ✎ All optional accessories installed on the aircraft engine and **FLYdat**. (The normal warranty policy for parts and accessories, if any, applies).
- ✎ Damage to the **FLYdat** resulting from running the aircraft engine without propeller.
- ✎ Damage to the **FLYdat** resulting from modification to the aircraft engine not approved in writing by BOMBARDIER-ROTAX.
- ✎ Damage caused by electrolysis.
- ✎ Use of a gear reduction not designed by BOMBARDIER-ROTAX.
- ✎ Use of propellers which exceed the inertia and balance limits as specified by BOMBARDIER-ROTAX.
- ✎ If sensors recommended by BOMBARDIER-ROTAX have not been installed.
- ✎ Losses incurred by the **FLYdat** owner other than the parts and labour, such as, but not limited to, mounting and dismounting of the **FLYdat** from the aircraft, loss of use, transportation, towing, telephone calls, taxis, or any other incidental or consequential damage.
- ✎ Damage resulting from accident, fire or other casualty, misuse, abuse or neglect.
- ✎ Damage/rust/corrosion/premature wear to the **FLYdat** caused by water ingestion.
- ✎ Damage resulting from sand/stones infiltration.
- ✎ Damage resulting from any foreign material ingestion.
- ✎ Damage resulting from service by an unqualified mechanic.

Page - 44 -	Date 1997 10 01	OM <i>FLYdat</i>	Reference	Modification-No. - 0 -
----------------	--------------------	---------------------	-----------	---------------------------

9.5) Expressed or implied warranties:

This warranty gives you specific rights, and you may also have other legal rights which may vary from state to state, or province to province. Where applicable this warranty is expressly in lieu of all other expressed or implied warranties of BOMBARDIER-ROTAX, its distributors and the selling distributor, including any warranty of merchantability or fitness for any particular purpose; otherwise the implied warranty is limited to the duration of this warranty. However, some states or provinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply.

Neither the distributor, nor any other person has been authorized to make any affirmation, representation or warranty other than those contained in this warranty, and if made, such affirmation, representation or warranty shall not be enforceable against BOMBARDIER-ROTAX or any other person.

BOMBARDIER-ROTAX reserves the right to modify its warranty policy at any time, being understood that such modification will not alter the warranty conditions applicable to *FLYdat* sold while the above warranty is in effect.

9.6) Consumer assistance procedure:

If a servicing problem or other difficulty occurs, please, contact:

-  authorized BOMBARDIER-ROTAX service-center or
-  authorized BOMBARDIER-ROTAX distributor.

9.7) Warranty claims

Warranty will only be valid if the end user completes this registration card as soon as the **FLYdat** goes into service, and returns it to the national authorized BOMBARDIER-ROTAX distributor (marked with "➤" in section 5) of the area in which the **FLYdat** is firstly operated.

This warranty will be effective for all **FLYdat** delivered by BOMBARDIER-ROTAX as of Jan. 1st, 1994.

9.9) Caution



DANGER!

Prior to taking FLY dat into operation, read the User's Guide in its entirety, as it contains important safety information.

Before the content of the manual is not understood completely you may not take the Fly dat into service.

Blank page

Modification-No. - 0 -	Reference	OM FLYdat	Date 1997 10 01	Page - 47 -
---------------------------	-----------	--------------	--------------------	----------------

Blank Page

Page - 48 -	Date 1997 10 01	OM FLYdat	Reference	Modification-No. - 0 -
----------------	--------------------	--------------	-----------	---------------------------

7) Warranty registration card



Warranty registration card

Issue 94 10 01



ROTAX

1. To be eligible for warranty, this registration card must be returned completed and signed by the end user to the authorized ROTAX distribution partner (marked with "►" in section 8) of the area of the permanent residence of the end user and/or in which the **FLYdat** is firstly operated, within 30 days as of date of purchase.
2. No other warranties and/or guarantees than defined in the actual warranty conditions are made.
3. **FLYdat** -type: ☐ **AC** ☐ **LC**
☐ **912** ☐ **Standard**
☐ **914**

FLYdat -no.:

Engine type.: Engine no.:

Gearbox: Reduction i =

Invoice-no.: date of purchase:

Warranty expires:

Buyer:

Seller:

I have read and understood the User's Guide in its entirety and carefully follow all given advices.

Date: Signature:



▲DANGER!

Prior to taking FLYdat into operation, read the User's Guide in its entirety, as it contains important safety information.

Before the content of the Manual is not understood completely you may not take the FLYdat into Service.

Absender:
Expéditeur:

Postleitzahl - Code postal

Postkarte
Carte postale

M a r k e
T i m b r e

Postleitzahl - Code postal Bestimmungsort - Lieu de destination

Bestimmungsland - Pays de destination

Warranty registration card

Issue 97 01 01



ROTAX®

1. To be eligible for warranty, this registration card must be returned completed and signed by the end user to the authorized ROTAX distribution partner (marked with "►" in section 8) of the area of the permanent residence of the end user and/or in which the *FLYdat* is firstly operated, within 30 days as of date of purchase.
2. No other warranties and/or guarantees than defined in the actual warranty conditions are made.
3. *FLYdat* -type: ☐ **AC** ☐ **LC**
☐ **912** ☐ **Standard**
☐ **914**

FLYdat -no.:

Engine type.: Engine no.:

Gearbox: Reduction i =

Invoice-no.: date of purchase:

Warranty expires:

Buyer:

Seller:

I have read and understood the User's Guide in its entirety and carefully follow all given advices

Date: Signature:

